

CS 5 Conference System

Quick Start Guide


1. Place the CS 5 BU Base Unit, CS 5 VU Voting Stations, CS 5 DU Delegate Stations, CS 5 IU Interpreter Stations (if any), and CS 5 IRT 1 or CS 5 IRT 2 Infrared Radiators at their intended locations.

Screw the microphone capsules on the goosenecks.
Connect the microphones to the microphone inputs on the microphone stations.

2. Make all audio, system bus, and infrared connections.

Use the supplied system cables to wire the system bus (if you use your own CAT5 cables take care that they are **SHIELDED** – please understand that AKG takes responsibility only for AKG cables):

Connect the “ring” to the system connectors on the rear of the CS5BU and daisy chain all stations.

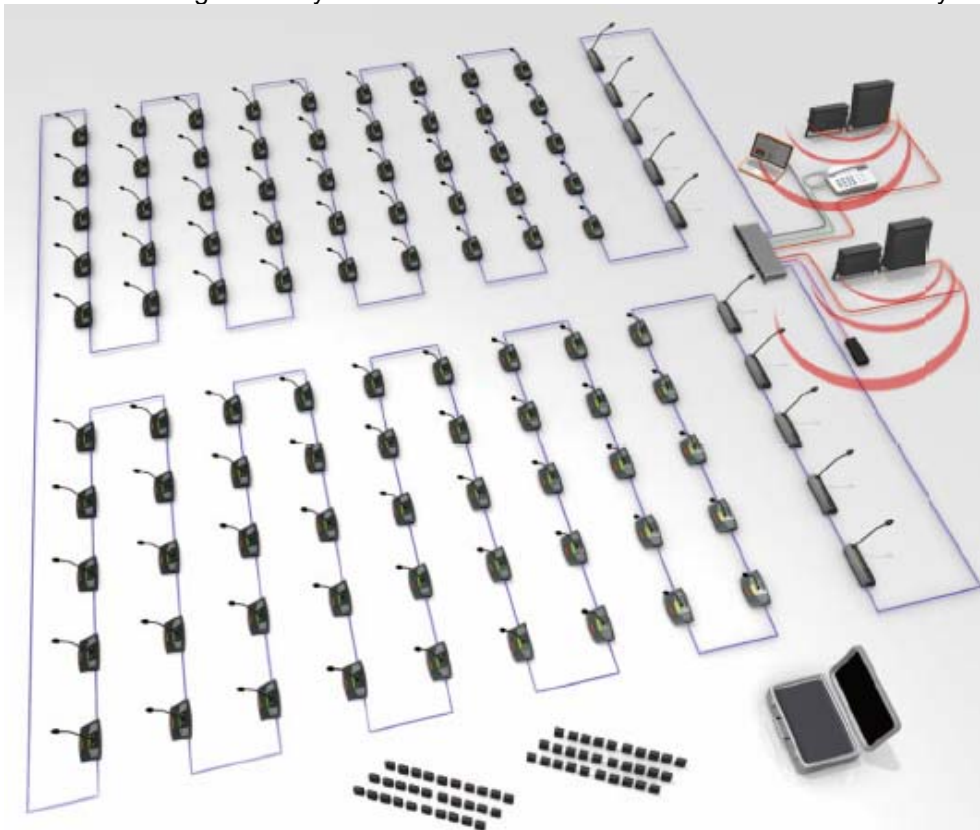

Use no cables that are longer than 330 feet (100 m) to connect one microphone station to another.

Make sure to connect the last microphone station in the chain to the unused SYSTEM connector on the Base Unit rear panel.

