



Public Address System

Wall Mount Speaker System WL8063



WL8063W White



WL8063B Black

OWNER'S MANUAL


Guangzhou DSPPA Audio Co., Ltd. is the editor in chief of the Technical Code for PA System Engineering; also it is a national high-tech enterprise. DSPPA PA speaker system is widely used in 2008 Beijing Olympics, Expo 2010 Shanghai China, airport, railway station, etc.

FEATURES:


- Input 70V/100V/4-16 Ω , sensitivity $90 \pm 2\text{dB}$, rated power 30W. Max. SPL $104 \pm 2\text{dB}$, Effective Freq. Range 80Hz - 20kHz;
- Weight 3.0 kg, equipped with hanging holes for mounting convenient;
- Made of high quality engineering plastic, long-term durability, never out of shape and fade;
- Long life, sounds clear and sonorousness.

FREQ. RESPONSE

(dB SPL, 1W, 1m)

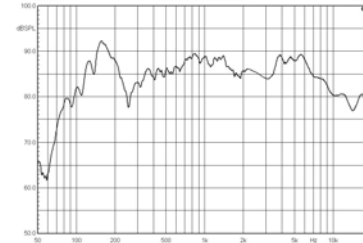


HANGING HOLE

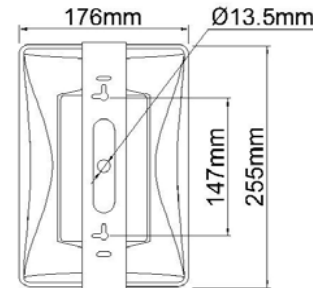


DISTORTION

(THD < 1.5% 1W, 1m, 200Hz-12kHz)

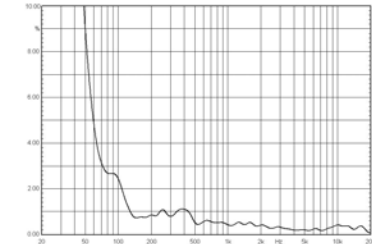

NAIL FOR MOUNTING

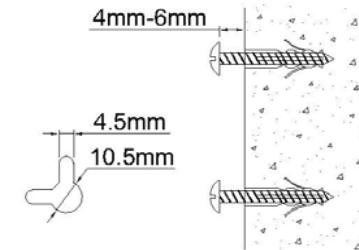

INSTALLATION

1. Fit two $\text{Ø}4\text{mm}$ nails on wall where it is needed to install a speaker system.
2. Connect audio broadcasting wire to the speaker according to the table below.

Impedance	Input Voltage	
	70V	100V
160 Ω	30W	※
300 Ω	15 W	30W
600 Ω	8W	15W
1K Ω	5W	8W
2 K Ω	2.5W	5W

3. Position the speaker, then adjust the direction of it and examine whether it is steady.