


Fender

SMOLDER ACOUSTIC OD

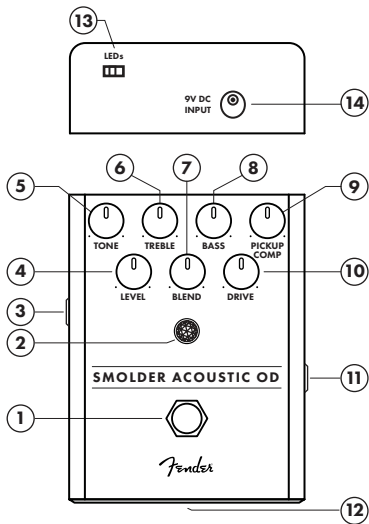

1. Bypass Footswitch

2. Jewel Indicator

3. Output Jack

4. Level

5. Tone

6. Treble

7. Blend

8. Bass

9. Pickup Comp

10. Drive

11. Input Jack

12. Low Battery Indicator

13. LED Kill Switch

14. DC Power Connector

Fender®

SMOLDER ACOUSTIC OD

Thanks for purchasing Smolder Acoustic Overdrive – our first drive pedal designed specifically for acoustic guitar. Smolder works by using a pickup compensation control to filter out some of the unwanted sonic characteristics of acoustic pickups. Distortion comes next using the Drive control, followed by EQ and Filter controls for many shaping options. The signal is finally fed through an all-analog cabinet simulation before exiting at the output jack. The result is a warm, natural-sounding overdrive that plays especially well with full-range acoustic amps and PA systems.

DESIGNED IN CALIFORNIA, U.S.A.

Tone

The tone control is a filter that takes “fizz” out of the overdrive.

Treble

Controls high-frequency boost/cut.

Bass

Controls low-frequency boost/cut.

Pickup Comp

Combines fixed-low pass and variable high pass filters; ideal for acoustic pickups.

Level

Controls overall output level.

Blend

Blends between 100% of the original guitar signal (counterclockwise), to 100% of the distorted guitar signal in the (clockwise).

Drive

Controls amount of overdrive.

Jewel Indicator

Illuminates when effect is engaged.

Bypass Footswitch

Bypasses effect.

Input Jack

High-impedance input suitable for electric guitar, bass, acoustic guitars with pickup systems, keyboards and other instruments.

Output Jack

Low-impedance output jack connects to amp or to next effect pedal in signal chain.

DC Power Connector

Standard center-negative 9VDC jack for use with appropriate power supplies.

LED Kill Switch

Deactivates control-knob illumination.

A PRODUCT OF:
FENDER MUSICAL INSTRUMENTS CORPORATION
CORONA, CALIFORNIA, USA

Fender® is a registered trademark of FMIC.

Copyright © 2019 FMIC. All rights reserved.

P/N 7717101000 - REV 1


Important Safety Instructions

- **WARNING:** To prevent damage, fire or shock hazard, do not expose the unit or its AC power to rain or moisture.
- Do not alter the AC plug of the connected power adapter
- Do not drip or splash liquids on the unit.
- No user serviceable parts inside, refer servicing to qualified personnel only.
- **WARNING:** The unit must only be connected to a safety agency certified, regulated, power source (adapter), approved for use and compliant with applicable local and national regulatory safety requirements.
 - Unplug the AC power adapter before cleaning the unit exterior. Use only a damp cloth for cleaning and then wait until the unit is completely dry before reconnecting it to power.
 - Amplifiers and loudspeaker systems, and ear/headphones (if equipped) are capable of producing very high sound pressure levels which may cause temporary or permanent hearing damage. Use care when setting and adjusting volume levels during use.

Additional Languages

Manual available in additional languages at:
www.fender.com/support

Specifications

IMPEDANCES:	INPUT: 500k Ω	OUTPUT: 470 Ω
POWER SUPPLY:	9VDC regulated adapter, 5.5 x 2.1 mm barrel connector, center negative	
POWER REQUIREMENTS:	105mA @ 9VDC 	
DIMENSIONS:	3.75" x 4.9" x 2.5" (95.25mm x 124.5mm x 63.5mm)	
WEIGHT:	1.2lbs (.54kg)	



Product specifications subject to change without notice



Fender®

© FENDER MUSICAL INSTRUMENTS 2019

产品中有害物质的名称及含量

部件名称	有害物质					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
箱体	O	O	O	O	O	O
喇叭单元*	O	O	O	O	O	O
电子部分	X	O	X	O	O	O
接线端子	X	O	O	O	O	O
电线	X	O	O	O	O	O
附件	O	O	O	O	O	O

本表格依据 SJ/T 11364 的规定编制。

O: 表示该有毒有害物质在该部件所有均质材料中的含量均在 GB/T 26572 规定的限量要求以下。

X: 表示该有毒有害物质至少在该部件的某一均质材料中的含量超出 GB/T 26572 规定的限量要求。

注: 含有有害物质的部件由于全球技术发展水平限制而无法实现有害物质的替代。

*产品含有喇叭单元时有效。