

## Headset Microphone

- ①. Gooseneck
- ②. Adjustable Headband
- ③. 4 Pin Mini XLR
- ④. 4 Pin Hirose Connector (Option)
- ⑤. 3 Pin Mini XLR (Option)
- ⑥. 3.5 Stereo Plug (Option)
- ⑦. Windscreen

### CM-214i Lightweight Headset Microphone

- \* Comfortable, lightweight and confident.
- \* Omni-directional pick up pattern .
- \* Smooth frequency response.
- \* No proximity effect.
- \* High quality steel headband assures durability, mini gooseneck for best position.
- \* Adjustable headband.
- \* A drip ring is offered.
- \* Carry pouch is provided.
- \* Detachable cable.

Available Color : Beige  
Black





### CM-214Ui Uni-direction Lightweight Headset Microphone

The CM-214Ui is of a low profile headband as CM214i

Model No.	CM-214i	CM-214Ui
Frequency Response	60 ~ 15,000Hz	30 ~ 18,000Hz
Polar Pattern	Omni-directional	Cardioid
Sensitivity @ 1 KHz	-60±3dB *(1mV)*0dB=1V/μbar	-68±3dB *(0.4mV)*0dB=1V/μbar
Impedance	1.8kΩ	680Ω
max. SPL for 1% T.H.D.	130dB	130dB
Connector Type	4 Pin Mini XLR	4 Pin Mini XLR
Standard Accessories	Windscreen	Windscreen

**МУЗЦЕНТР**  
МУЗЫКАЛЬНОЕ ОБОРУДОВАНИЕ

<https://muzcentre.ru>

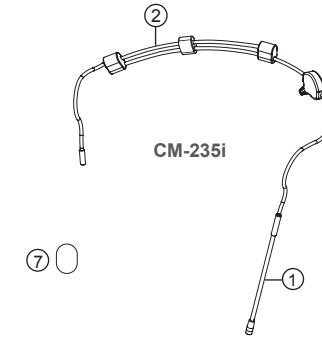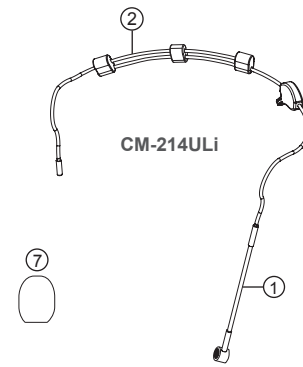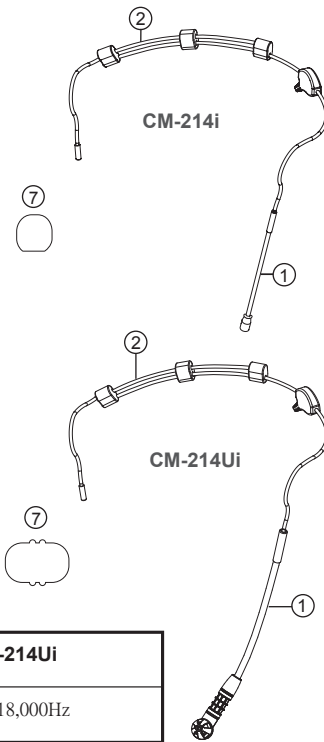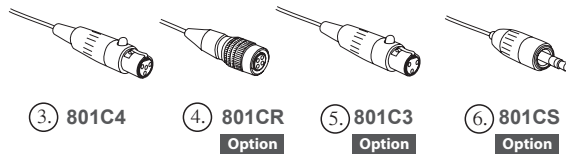

### CM-214ULi Lightweight Unidirectional Headset Microphone

- \* Comfortable, lightweight and confident.
- \* Uni-directional pick up pattern.
- \* Smooth frequency response.
- \* High quality steel headband assures durability, mini gooseneck for best position.
- \* Adjustable headband.
- \* Bundled with three detachable cables.
- \* Carry pouch is provided
- \* Detachable cable.

Available Color : Beige  
Black

### CM-235i Subminiature Headset Microphone

- \* For theatre, live sound, TV and musicals.
- \* Omni-directional.
- \* Excellent acoustic performance.
- \* Very comfortable to wear.
- \* High quality mini gooseneck assures best miking position.
- \* Adjustable headband.
- \* Detachable cable.

Available Color : Beige  
Black

Model No.	CM-214ULi	CM-235i
Frequency Response	100 ~ 18,000Hz	50 ~ 18,000Hz
Polar Pattern	Cardioid	Omni-directional
Sensitivity @ 1 KHz	-65±3dB *(0.56mV)*0dB=1V/μbar	-53±3dB *(2.24mV)*0dB=1V/μbar
Impedance	1.8kΩ	1.8kΩ
max. SPL for 1% T.H.D.	120dB	130dB
Connector Type	4 Pin / 3 Pin Mini XLR 3.5 Stereo Plug	4 Pin Mini XLR
Standard Accessories	Windscreen	Windscreen

Condenser Headset  
Microphones

# *Condenser Headset* **Microphones**

