
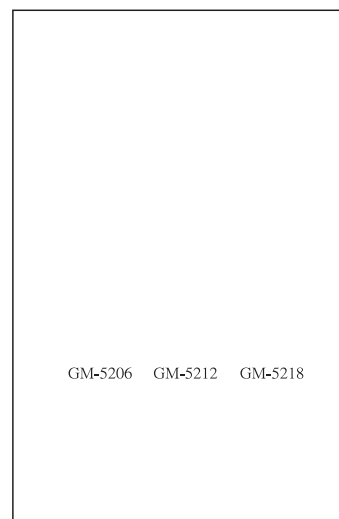


GM- 5200 Series Gooseneck Microphones

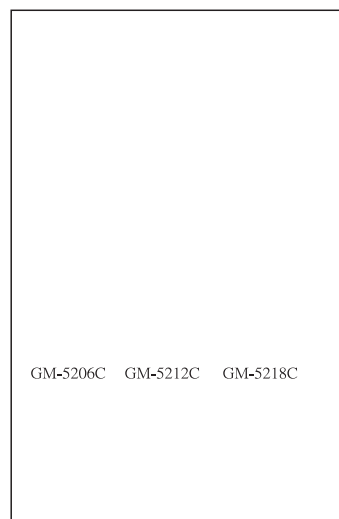


Features:

- The GM-series are wide-range condenser microphones with uni-direction polar pattern, that they are optimal for speech and other demands in sound pick-up situation.
- Detachable microphone head provides great convenience in replacing and repairing.
- GM-5206C/GM-5212C/GM-5218C feature an additional 3 meter cable, offering extended length for greater positioning range.
- GM-5206/GM-5212/GM-5218 feature a 3P XLR connector insert, allowing it to be plugged directly into a matching panel jack or cable connector.
- The small diameter gooseneck permits high flexibility in proper position, and multiple gooseneck length is able to match different requirement.

Installation:

GM-5206C/GM-5212C/GM-5218C:


1. Equipped with built-in power module , that an external battery power or phantom power source is required to power the unit.
2. Screw microphone flange tightly onto a mounting stud of floor stand or conference table and make suitable cable length. (figure 1)
3. Adjust gooseneck for aiming the microphone toward the proper sound source. (figure 3)
4. Slip on windscreen over the microphone head to control breath and popping noise. (figure 4)

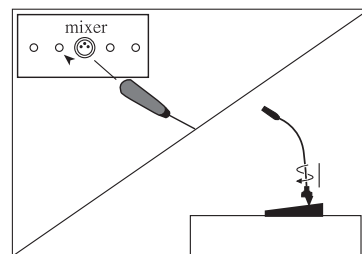


(Figure 1)

GM-5206/GM-5212/GM-5218:


1. Equipped with built-in power module , that an external a battery power or phantom power source is required to power the unit.
2. Plug connector insert directly into a 3P panel jack on floor stand or conference table. (Figure 2)
3. Adjust gooseneck for aiming the microphone toward the proper sound source. (Figure 3)
4. Slip on windscreen over the microphone head to control breath and popping noise. (Figure 4)

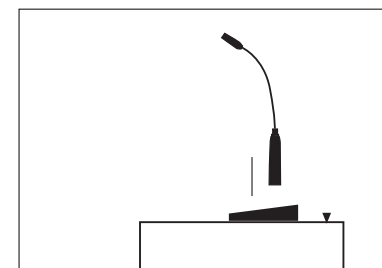

(Figure 2)

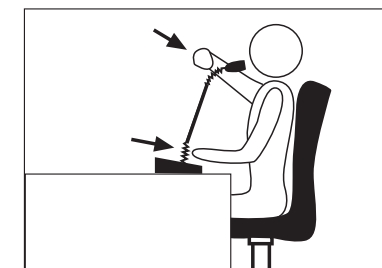


(Figure 3)

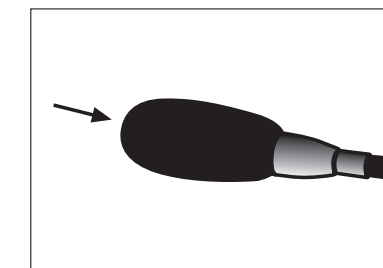

(Figure 4)

Specification:

Capsule type: Electret Condenser
 Polar pattern: Supercardioid
 Sensitivity(at 1,000 Hz):-58dB (1.25mV)
 Impedance: 220 Ω \pm 30%
 Max. SPL for 1 % THD.:125dB
 Output connector: Balanced XLR(M) type
 Frequency response: 80 ~ 18,000Hz

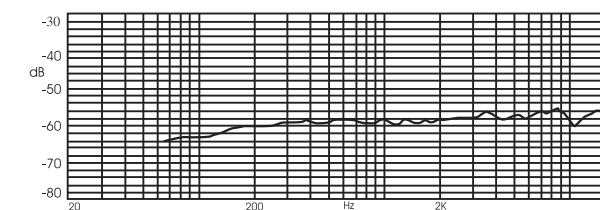

Frequency response

Accessories:

Windscreen


Model Variations:

GM-5206/GM-5206C : 6" (152 mm) gooseneck microphone
 GM-5212/GM-5212C : 12" (305 mm) gooseneck microphone
 GM-5218/GM-5218C : 18" (457 mm) gooseneck microphone



<https://muzcentre.ru>

Dimension:

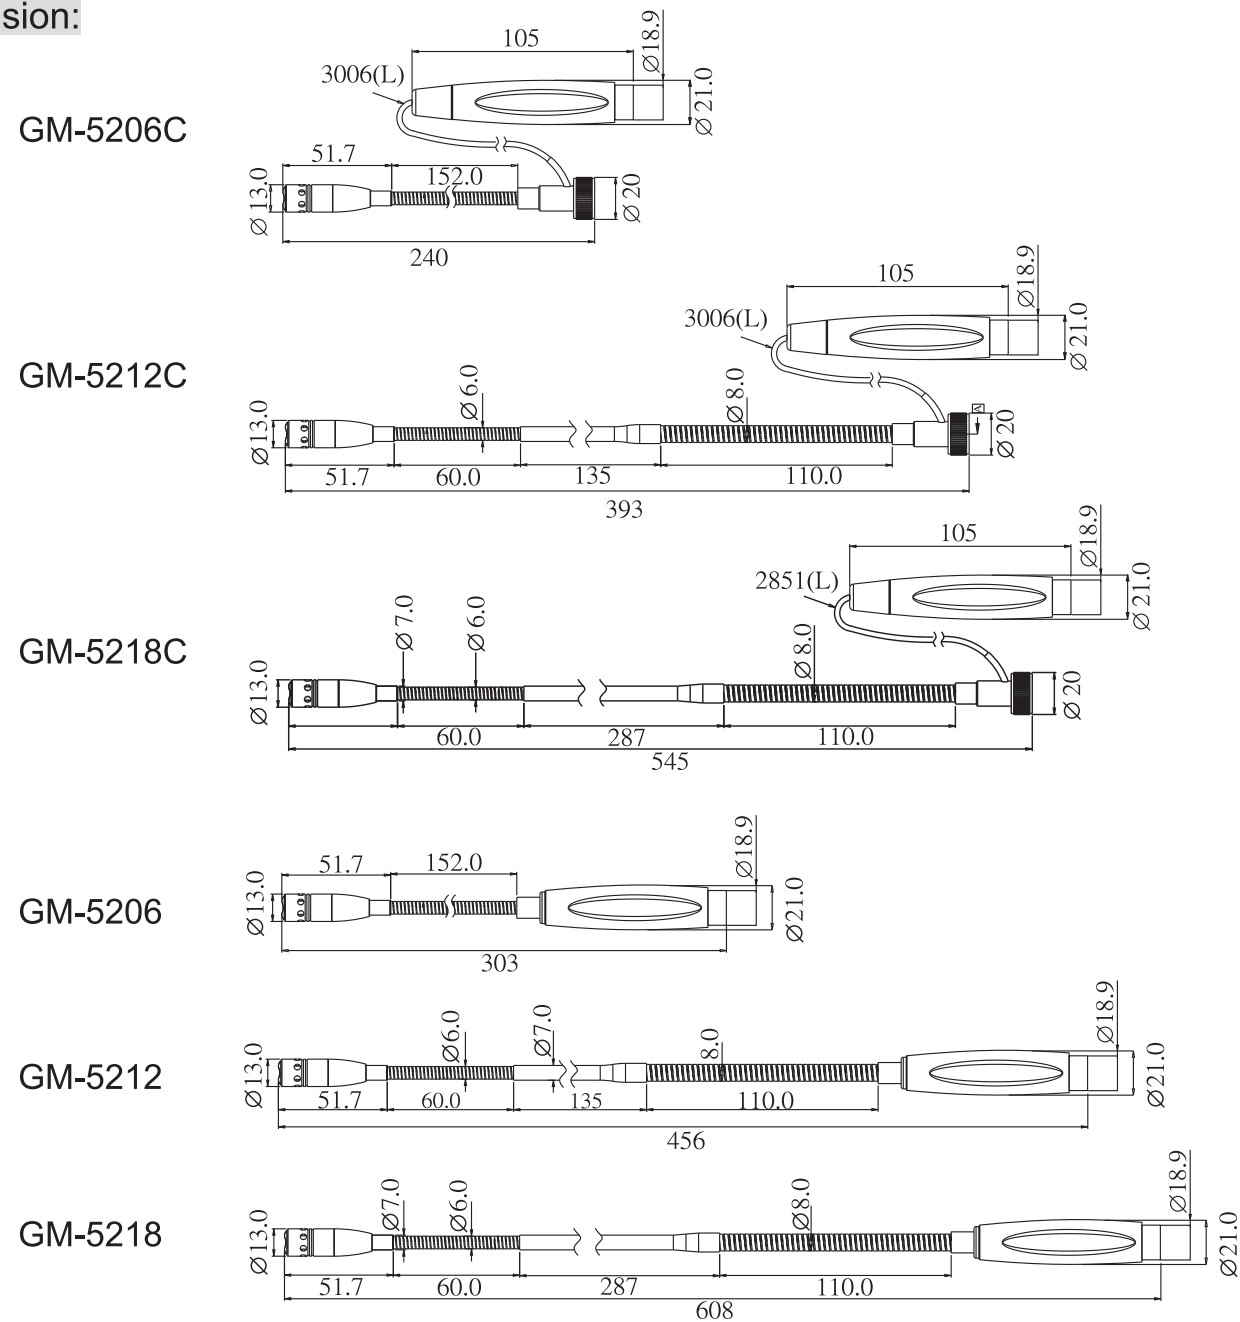

GM-5200 Series Gooseneck Microphone **JTS**®

INSTRUCTION MANUAL

GM-5200-01