


TL200DT USB

Presentation:

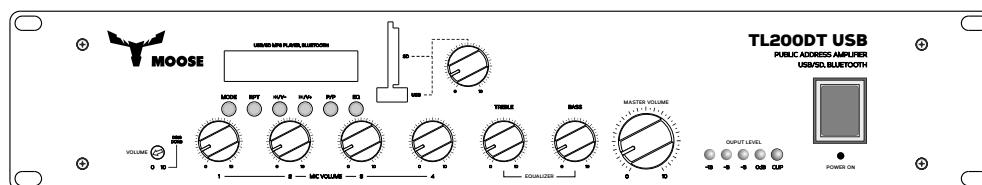

TL200DT USB is a public address amplifier developed for both mobile and fixed installations.

This amplifier features four balanced XLR 3p microphone + respective Euroblock terminal inputs plus two line inputs in RCA connector, low impedance (4-16Ohm) and high impedance (100V) outputs both in screw terminals. A built-in phantom power supply with on/off push switch is available as well as a priority microphone input in DIN 5p connector. There is also very useful Slave & REC outputs in RCA connectors, and a 2-band equalizer and MASTER level controls


As a digital audio source the TL200DT USB incorporates an MP3/WMA player that accepts files from its USB and SD ports, as well as FM radio and Bluetooth connectivity. A blue 16*2 dot matrix screen display shows all functions available.

Solid 2U - Rack 19" enclosure construction.

Features:

- High quality PA amplifier
- Installation PA mixer-amplifier
- 4 Microphone inputs and 1 Line input
- 4-16 ohm & constant-volt. out. (70V and 100V)
- Bluetooth connection
- FM tuner and MP3 USD/SD slot
- Bass and Treble tone controls
- Ding-dong and Priority muting by VOX
- Built-in electronic protection circuitry
- Solid construction for 19" rack - 2U mounting

Rear view:



Technical specifications:

Type	Professional PA mixer-amplifier
No. of channels	4 microphone, 1 line
RMS Power @ 8ohm	200W (rms)
Frequency Range	50Hz - 14kHz, ±0.3dB
THD.	< 1.0% @ 1kHz
S/N ratio	> 90dB @ 1kHz
Zones	No
Controls	Bass, Treble, Master, volume for MIC & LINE in
Indicators	Power on, Signal and Clip
Inputs	Microphone, Line
Outputs	4-16 ohm, 100V
Connectors	Input (XLR 3p, Euroblock), Link (RCA) & REC (RCA) Output: touch-proof binding post
Phantom Power	+48V DC
Other features	Ding-dong, priority MIC, MIC/LINE switch
AC connector	IEC
Protections	Thermal overload, short circuit, temperature control
Operating Voltage	220-240V AC (factory configured), 50-60 Hz
Power consumption	220VA
Cooling	Continuous speed fan, 80mm / 230V AC
Dimensions	2RU space, 345mm (13.58in) depth
Weight	12Kg 26.46lb

Audio module/player

Features	Auto power on SD/card and USB ports SD/USB individual volume control Supports MP3/WMA Bluetooth, two-way comm. function Key standby function 16*2 dot matrix screen display
----------	---

