

NOVACORD

MULTICORE 4P 23/1 DMX FRNC/LSZH-C



Oxygen Free
Copper 99,9%



Analog and
digital signals



One inner and
two overall screens





Pure signal
transmission
of 4x2 cores



Audio cables are used in professional broadcast systems to transmit analog and digital AES/EBU audio signals. The cable contains 4 pairs of twisted two copper cores. Each pair is protected by its own aluminum foil screen, as well as the cable has two overall screens - aluminum foil and braid tinned copper screens. Cable designed to avoid the release of toxic matter in case of fire because they do not contain any halogens.

 **МУЗЦЕНТР**
МУЗЫКАЛЬНОЕ ОБОРУДОВАНИЕ
<https://muzcentre.ru>


Pictures:



HIGHEST QUALITY - RELIABILITY - INNOVATION

Novacord

Multicore audio cable 4P 23/1 DMX, AWG 23, FRNC/LSZH-C, IEC 60332-3-24

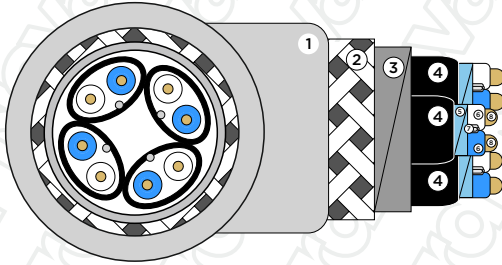

- 1 - Jacket
- 2 - Overall screen #1
- 3 - Overall screen #2
- 4 - Pair jacket
- 5 - Pair screen
- 6 - Insulation
- 7 - Drain wire
- 8 - Conductor

Structure

Conductor	Cross Sec. Area	0.26 mm ² Ø 0.56 mm
	No. of Cores	8 cores
	Material	OFC
	Type of conductor	Solid
	Strands	1/0.56 mm
Insulation	Material	FPE
	Diameter	1.4 ±0.1 mm
	Color	Blue, White
Pair stranding		Two cores twisted to the pair
Pair screen #1	Material	Aluminum Foil
	Diameter	Ø 2.5 mm
Pair screen #2	Type	Drain wire
	Material	Tinned OFC
	Composition	7/0.16±0.008 mm
Pair jacket	Material	LSZH-FR
	Diameter	Ø 3.3 mm
Overall Screen #2	Material	Aluminum Foil
Overall Screen #1	Material	Tinned copper
	Type	Braid
	Covering	80%
Jacket	Material	FRNC/LSZH-C
	Diameter	9.5±0.2 mm
	Color	Grey, RAL7001

Multicore audio cable 4P 23/1 DMX, AWG 23, FRNC/LSZH-C, IEC 60332-3-24

Mechanical properties

Bending radius	without load	10xD (outer diameter)
	with load	15xD (outer diameter)
Temperature range	-30°C to +70°C	

Electrical properties

DC loop Resistance	≤ 165 Ω/km
Insulation resistance	≥ 2000 MΩ/km
Mutual capacitance at 800 Hz	nom. 45 nF/km
Test voltage	700 V
Capacitance unbalance (pair to ground)	≤ 1200 pF/km
Velocity ratio	approx. 78%
Characteristic impedance	110 Ω ± 10%

Standarts

Flame resistance	IEC 60332-3-24
Amt of Halogen	zero

Technical data

Article	Delivery length	Drum size	Weight
500DW	500 m	400/160/200	58.5 kg

© NOVACORD Inc. 2022 All Rights Reserved

All sizes and values without tolerances are reference values. Specifications are for product as supplied by Novacord Inc. Although Novacord makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described here in are subject to error or omission

Novacord Inc. provides the information and specifications herein on an "ASIS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Novacord be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Novacord has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Novacord Inc. The information is believed to be correct at the time of issue. Novacord Inc. reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by Novacord Inc.

HIGHEST QUALITY - RELIABILITY - INNOVATION

novacord.de