

B08108

DESCRIPTION

2x 550Wrms CLASS-D amplifier, lightweight (only 3,85kg) with powerful low-frequency reproduction and crystal-clear high frequencies. Perfect for clubs, rental, theater, ...

FEATURES

- This SE-1100 power amplifier is unprecedented in terms of price / performance.
- The sophisticated design of this lightweight CLASS-D amplifier ensures excellent and powerful low-frequency reproduction combined with crystal clear and delicately balanced high frequencies.
- Thanks to the big power reserve, excellent limiters and protections it can be used in all kinds of different applications such as discotheques, clubs, mobile audio, PA, rental, theater, ...
- The extremely high efficiency, reduced power waste and very low heat dissipation are the main advantages of this compact amplifier!
- Incredible space savings for mobile applications: depth of the 1.5U enclosure is only 21cm!
- Incredibly low weight, only 3,85kg!
- Power output, stereo:
 - $2x 300Wrms @ 8 \Omega$
 - 2x 550Wrms @ 4 Ω
- Power output, bridge:
 - 1x 1100Wrms @ 8 Ω
- All the protections you can think of for professional use:
 - Inaudible signal + current limiter
 - Overload protection
 - Short circuit current protection
 - DC protection
 - Thermal protection
 - AC / VHF protection
 - Soft start
 - o ...
- 3 different working modes: stereo, bridge mode, mono mode (inputs linked)
- Input sensitivity: 0,7 V / 1 V / 1,4 V
- Balanced in/outputs on XLR
- 2 Speakon® compatible connectors (left and right outputs)
- 1 separate output for bridge mode







www.synq-audio.com | https://www.facebook.com/synq.audio/

TECHNICAL SPECIFICATIONS

General: Application DJ & Club, Stage & Rental

General: Series

General: Dimensions (cm) 48.2 x 6.6 x 21.5

General: Weight (kg) 3.85 **General: Color** black

General: Powerinput AC 230V, 50Hz

General: Energy Label Νo **General: Power consumption W** 1200 **General**: Display No

General: Fixation 19" rack mountable

General: RU 1.5U **General: IP rating** indoor Audio: amplifier class D Audio: min. frequency (Hz) 20 Audio: max. frequency (Hz) 20000 Audio: S/N ratio (> dB) 103 Audio: damping factor (>...) 400 Audio: max. output channels 2 Audio: Wrms 4Ω stereo, per 550 channel

Audio : Wrms 8Ω stereo, per


channel

Audio: Wrms 8Ω bridge 1100

Audio: functions bridge mode, limiter **Connections: input** 3 pin XLR, PowerCon® 3 pin XLR, speakon **Connections: output Brand** SYNQ

300

EA NCode 5420025681087

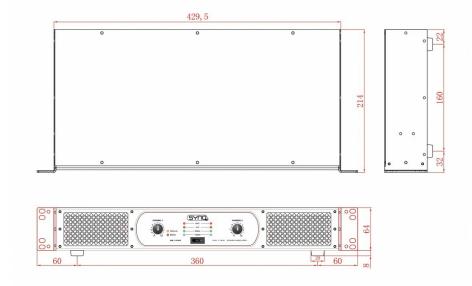

YOUR DEALER



www.synq-audio.com | https://www.facebook.com/synq.audio/