



Contents&Professional Power Amplifier Specifications

Contents&Professional Power Amplifier Specifications. 1

Important note. 2

Audio output connections&Rear panel features introduction. . 3

Control elements&Audio input connections. 4

Professional Power Amplifier Specifications

SPECIFICATIONS		
ITEM	DA2504	DA5004S
Output Power		
8R Stereo Power	4*250W	4*500W
4R Stereo Power	4*450W	4*800W
8R Bridged Monon Power	2*800W	2*1500W
Frequency Response	20Hz-20KHz	
THD+N 1KHz 1W 8R	<0.1%	
Signal to Noise Ratio 1KHz	>110dB	
Class	D	
Protection	Short, DCP, OVP, UVP, OCP, OTP	
Operating Voltage	90V-135V / 180V-265V	
Input Sensitivity	1V	
Input Impedance	20K	
Dimensions(W*H*D)	483*44*325mm	
Packing Dimension	550*100*450mm	
Net Weight(kg)	5.6	5.8
Gross Weight(kg)	7.2	7.4

Important Note

WARNING NOTICES

SAFEGUARDS

Electrical energy can perform many useful functions, This unit has been engineered and manufactured to assure your personal safety. Improper use can result in potential electrical shock or fire hazards. In order not to defeat the safeguards, observe the following precautions for its installation, use and servicing.

Explanation of Graphical Symbols



**CAUTION
RISK OF ELECTRIC SHOCK
DO NOT OPEN**



**CAUTION
RISK OF ELECTRIC SHOCK:
OPEN ONLY IF QUALIFIED
AS SERVICE PERSONNEL**

**WARNING: TO PREVENT FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE
THIS EQUIPMENT TO RAIN OR MOISTURE**

IMPORTANT NOTE


ATTENTION: This unit must be protected from damp because of the risk of fire and the possibility of electric shocks.

1. Make sure that you have the correct mains voltage. Only operate the unit at the mains voltage marked on the rear panel.
2. Make sure that nothing especially no metal objects are inserted into the device. This could result in electric shock or malfunction.
3. If the unit is subjected to extreme fluctuations of temperature e.g. On being transported from outside into a heated room, condensation can form. This unit should not be used until it has reached room temperature.
4. In the event of water or any other fluid being accidentally spilt on the unit switch the unit off immediately and send it to a qualified service workshop for inspection.
5. Make sure that the unit is always well ventilated and never exposed to direct sunlight
6. Do not use sprays to clean the unit as they have a detrimental effect on the unit and could ignite suddenly.
7. The machine use single power switch, please cut off the power before fix.
8. Please do not put the cup, vessel of flower or container above the machine, in case the leak out water then cause the leakage current off the machine.




Audio output connections & Rear panel features introduction


Bridge Output connections

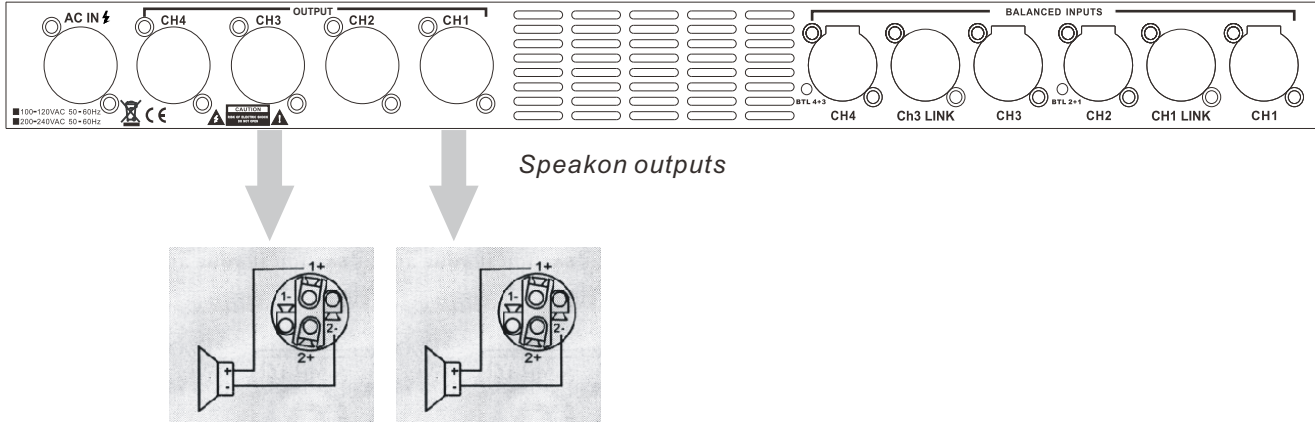

Stereo Output connections

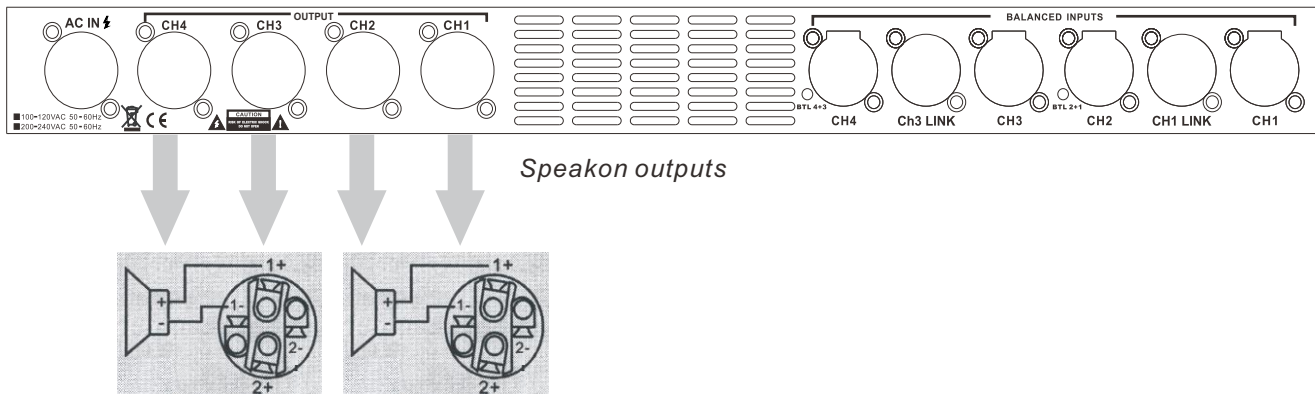

Rear panel features introduction

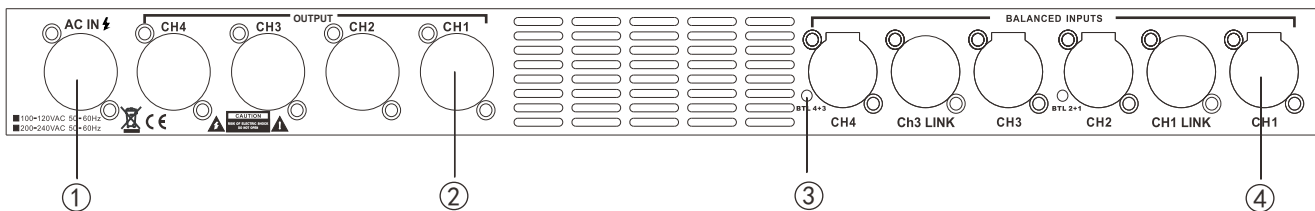


1. POWER SUPPLY INPUT
2. AMPLIFIER OUTPUT
3. BTL MODE
4. AUDIO INPUT

Control elements & Audio input connections

Front Panel

The front panel LED area includes the following indicators per channel:

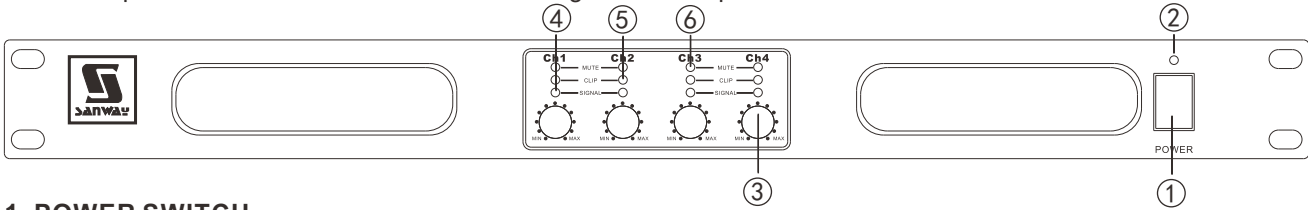

1. POWER SWITCH

Turn the unit power on or off

2. POWER LED

Indicate power on or off

3. LEVEL CONTROL

Calibrated detente potentiometers to alter the total gain of the power amplifier. In order to avoid distortions in mixing consoles upstream, The calibrated markings show the additional attenuation directly.

4. SIGNAL LED

Green SIG Indicates output signal levels in normal operating range

5. CLIP/LIMIT INDICATOR


This indicator signals if the amplifier output is clipping or limiting. When the LED lights up, the limit power function is working. If the LED flashes briefly, this is not a cause for concern. If this LED is lit permanently, the volume should be reduced to avoid overload damages to the connected loudspeaker systems.

6. MUTE LED


MUTE-Audio protection under mute position.

BALANCED INPUT CONNECTIONS

Pin 1 Ground/Shield
 Pin 2 Hot (+)
 Pin 3 Cold (-)

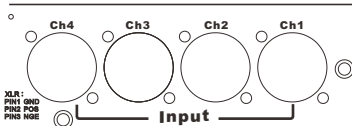


The XLR input connectors are electronically balanced, and wired according to the IEC 268 standard (pin 2= hot). XLR input connectors should be wired as follows:



When linking the same source signal to several input channels, be aware that there is a limit to the number of channels an output source can "drive". A typical output source (e.g. a DSP crossover unit) can drive up to two amplifier channels before external line-drivers might be required to buffer the signal.

Unbalanced Input connections

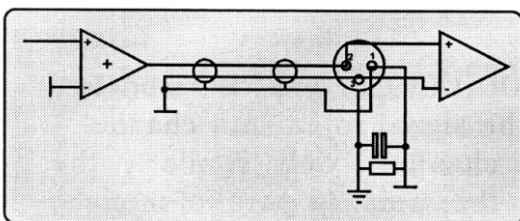

To connect an input to an unbalanced source, it is possible to connect pins 1 and 3 in the XLR plug at the amplifier end of the cable. However, a better method is to connect pin 3 to the shield at the source end of the cable, as this usually results in better hum and noise rejection. Balanced input connections are recommended whenever possible.